


ULTRA-MINI INDUCTIVE PROXIMITY SENSOR (10-30VDC/10-55VDC/5-36VDC)

Diameter
● Shielded ○ non-Shielded
Switching Distance, Sn: mm
Housing Material
● With LED ○ Without LED



φ3
●
0.6 mm
Stainless steel
●

φ3
●
0.6 mm
Stainless steel
●

Picture

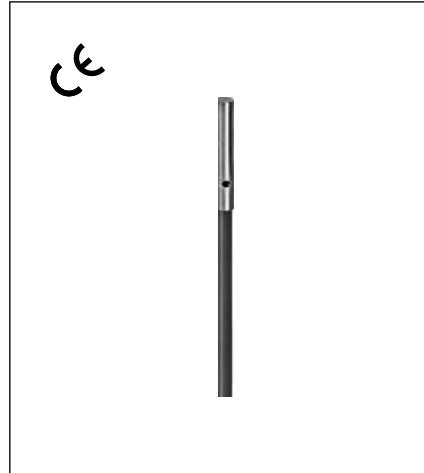

Dimensions (unit: mm)

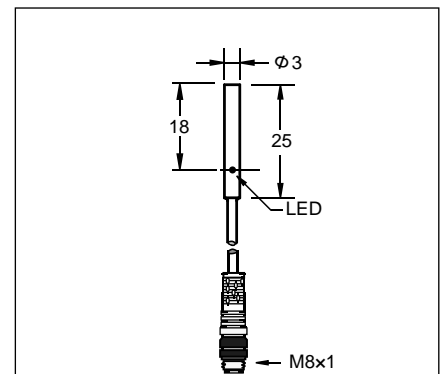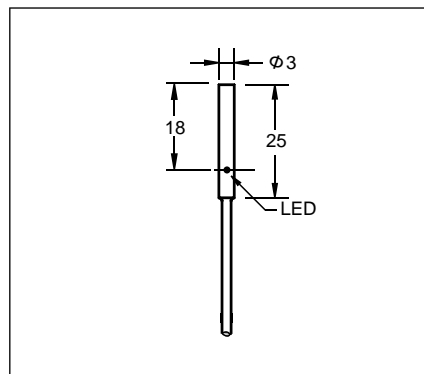

Ripple
No Load Current
Max. Load current
Leakage Current
Voltage Drop
Switching Frequency
Response Time
Switching Hysteresis
Repeat Accuracy
Protection Category
Operating Temperature
Temperature Drift
Short Circuit Protection
Overload Trip Point
Material Active Face

<10%
<10mA
100mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃- +70℃
<10%(Sr)
Yes
120mA
POM

<10%
<10mA
100mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃- +70℃
<10%(Sr)
Yes
120mA
POM

Connecting type
Weight

2M Cable (2.6 φ 3x0.15)
approx.25 g

6"pigtail
approx.28 g

DC 3 wire 10-30V NPN N.O.
DC 3 wire 10-30V NPN N.C.
DC 3 wire 10-30V PNP N.O.
DC 3 wire 10-30V PNP N.C.
DC 3 wire 10-55V NPN N.O.
DC 3 wire 10-55V NPN N.C.
DC 3 wire 10-55V PNP N.O.
DC 3 wire 10-55V PNP N.C.
DC 3 wire 5-36 V NPN N.O.
DC 3 wire 5-36 V NPN N.C.
DC 3 wire 5-36 V PNP N.O.
DC 3 wire 5-36 V PNP N.C.

ISS-S30.6N-A1VN2	1*
ISS-S30.6N-B1VN2	2
ISS-S30.6P-A1VN2	3
ISS-S30.6P-B1VN2	4

ISS-S30.6N-A1GN	1*
ISS-S30.6N-B1GN	2
ISS-S30.6P-A1GN	3
ISS-S30.6P-B1GN	4

* Wiring diagram number. Please see the relevant wiring diagram shown on Page 013 to Page 015.

ULTRA-MINI INDUCTIVE PROXIMITY SENSOR (10-30VDC/10-55VDC/5-36VDC)

Diameter
● Shielded ○ non-Shielded
Switching Distance, Sn: mm
Housing Material
● With LED ○ Without LED



M4
●
0.6 mm
Stainless steel
●

M4
●
0.6 mm
Stainless steel
●

Picture



Dimensions (unit: mm)

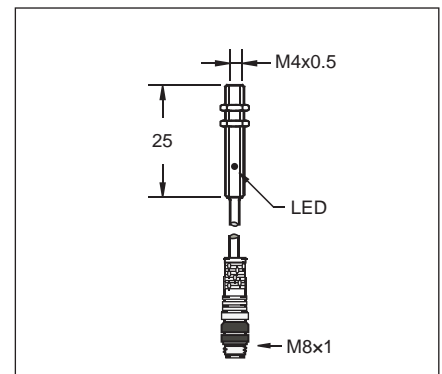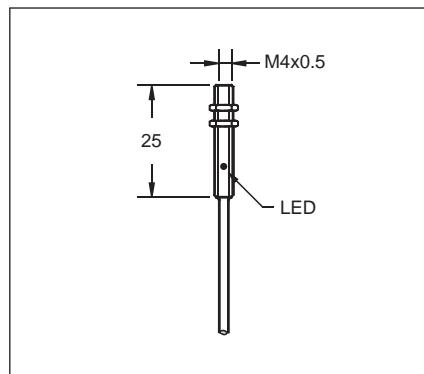

Ripple
No Load Current
Max. Load current
Leakage Current
Voltage Drop
Switching Frequency
Response Time
Switching Hysteresis
Repeat Accuracy
Protection Category
Operating Temperature
Temperature Drift
Short Circuit Protection
Overload Trip Point
Material Active Face

<10%
<10mA
100mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃ - +70℃
<10%(Sr)
Yes
120mA
POM

<10%
<10mA
100mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃ - +70℃
<10%(Sr)
Yes
120mA
POM

Connecting type
Weight

2M Cable (2.6 ϕ 3x0.15)
approx.25 g

6"pigtail
approx.30 g

DC 3 wire 10-30V NPN N.O.
DC 3 wire 10-30V NPN N.C.
DC 3 wire 10-30V PNP N.O.
DC 3 wire 10-30V PNP N.C.
DC 3 wire 10-55V NPN N.O.
DC 3 wire 10-55V NPN N.C.
DC 3 wire 10-55V PNP N.O.
DC 3 wire 10-55V PNP N.C.
DC 3 wire 5-36 V NPN N.O.
DC 3 wire 5-36 V NPN N.C.
DC 3 wire 5-36 V PNP N.O.
DC 3 wire 5-36 V PNP N.C.

ISS-M40.6N-A1VN2	1*
ISS-M40.6N-B1VN2	2
ISS-M40.6P-A1VN2	3
ISS-M40.6P-B1VN2	4

ISS-M40.6N-A1GN	1*
ISS-M40.6N-B1GN	2
ISS-M40.6P-A1GN	3
ISS-M40.6P-B1GN	4

* Wiring diagram number. Please see the relevant wiring diagram shown on Page 013 to Page 015.


ULTRA-MINI INDUCTIVE PROXIMITY SENSOR (10-30VDC/10-55VDC/5-36VDC)

Diameter
● Shielded ○ non-Shielded
Switching Distance, Sn: mm
Housing Material
● With LED ○ Without LED



Φ 4
●
1 mm
Stainless steel
●

Φ 4
●
1 mm
Stainless steel
●

Picture

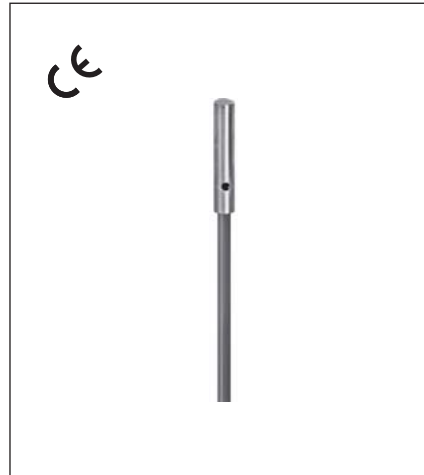

Dimensions (unit: mm)

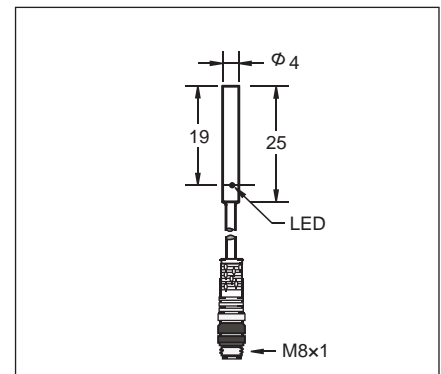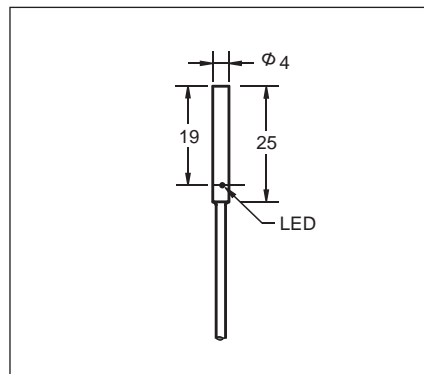

Ripple
No Load Current
Max. Load current
Leakage Current
Voltage Drop
Switching Frequency
Response Time
Switching Hysteresis
Repeat Accuracy
Protection Category
Operating Temperature
Temperature Drift
Short Circuit Protection
Overload Trip Point
Material Active Face

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃- +70℃
<10%(Sr)
Yes
220mA
POM

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃- +70℃
<10%(Sr)
Yes
220mA
POM

Connecting type
Weight

2M Cable (2.6 Φ 3x0.15)
approx.25 g

6"pigtail
approx.30 g

DC 3 wire 10-30V NPN N.O.
DC 3 wire 10-30V NPN N.C.
DC 3 wire 10-30V PNP N.O.
DC 3 wire 10-30V PNP N.C.
DC 3 wire 10-55V NPN N.O.
DC 3 wire 10-55V NPN N.C.
DC 3 wire 10-55V PNP N.O.
DC 3 wire 10-55V PNP N.C.
DC 3 wire 5-36 V NPN N.O.
DC 3 wire 5-36 V NPN N.C.
DC 3 wire 5-36 V PNP N.O.
DC 3 wire 5-36 V PNP N.C.

ISS-S401N-A1VN2	1*
ISS-S401N-B1VN2	2
ISS-S401P-A1VN2	3
ISS-S401P-B1VN2	4

ISS-S401N-A1GN	1*
ISS-S401N-B1GN	2
ISS-S401P-A1GN	3
ISS-S401P-B1GN	4

* Wiring diagram number. Please see the relevant wiring diagram shown on Page 013 to Page 015.


ULTRA-MINI INDUCTIVE PROXIMITY SENSOR (10-30VDC/10-55VDC/5-36VDC)

Diameter
● Shielded ○ non-Shielded
Switching Distance, Sn: mm
Housing Material
● With LED ○ Without LED



Φ 4
●
1.5 mm
Stainless steel
●

Φ 4
●
1.5 mm
Stainless steel
●

Picture

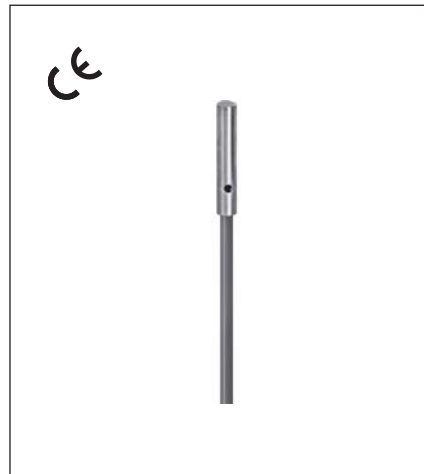

Dimensions (unit: mm)

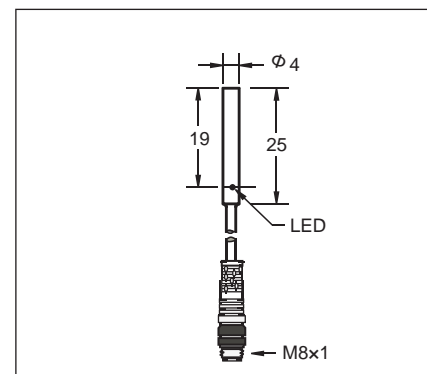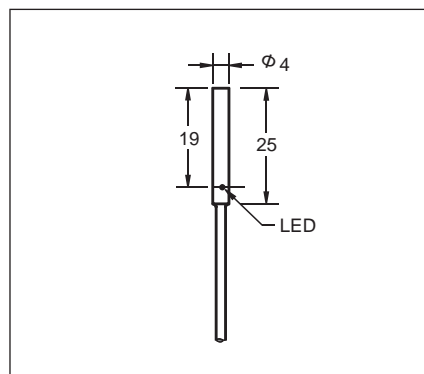

Ripple
No Load Current
Max. Load current
Leakage Current
Voltage Drop
Switching Frequency
Response Time
Switching Hysteresis
Repeat Accuracy
Protection Category
Operating Temperature
Temperature Drift
Short Circuit Protection
Overload Trip Point
Material Active Face

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃- +70℃
<10%(Sr)
Yes
220mA
POM

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃- +70℃
<10%(Sr)
Yes
220mA
POM

Connecting type
Weight

2M Cable (2.6 Φ 3x0.15)
approx.25 g

6"pigtail
approx.30 g

DC 3 wire 10-30V NPN N.O.
DC 3 wire 10-30V NPN N.C.
DC 3 wire 10-30V PNP N.O.
DC 3 wire 10-30V PNP N.C.
DC 3 wire 10-55V NPN N.O.
DC 3 wire 10-55V NPN N.C.
DC 3 wire 10-55V PNP N.O.
DC 3 wire 10-55V PNP N.C.
DC 3 wire 5-36 V NPN N.O.
DC 3 wire 5-36 V NPN N.C.
DC 3 wire 5-36 V PNP N.O.
DC 3 wire 5-36 V PNP N.C.

ISS-S41.5N-A1VN2	1*
ISS-S41.5N-B1VN2	2
ISS-S41.5P-A1VN2	3
ISS-S41.5P-B1VN2	4

ISS-S41.5N-A1GN	1*
ISS-S41.5N-B1GN	2
ISS-S41.5P-A1GN	3
ISS-S41.5P-B1GN	4

* Wiring diagram number. Please see the relevant wiring diagram shown on Page 013 to Page 015.

ULTRA-MINI INDUCTIVE PROXIMITY SENSOR (10-30VDC/10-55VDC/5-36VDC)

Diameter
● Shielded ○ non-Shielded
Switching Distance, Sn: mm
Housing Material
● With LED ○ Without LED



M5
●
1 mm
Stainless steel
●

M5
●
1 mm
Stainless steel
●

Picture



Dimensions (unit: mm)

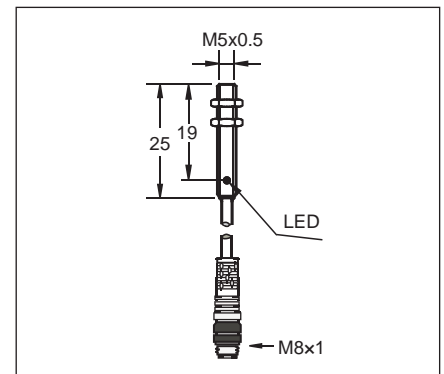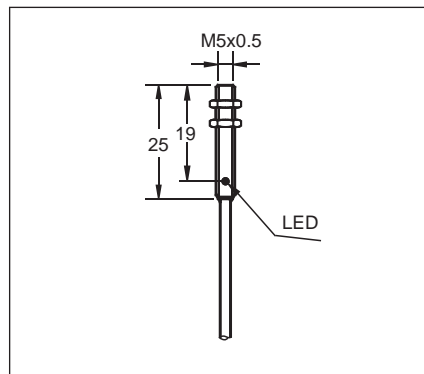

Ripple
No Load Current
Max. Load current
Leakage Current
Voltage Drop
Switching Frequency
Response Time
Switching Hysteresis
Repeat Accuracy
Protection Category
Operating Temperature
Temperature Drift
Short Circuit Protection
Overload Trip Point
Material Active Face

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃- +70℃
<10%(Sr)
Yes
220mA
POM

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃- +70℃
<10%(Sr)
Yes
220mA
POM

Connecting type
Weight

2M Cable (2.6 ϕ 3x0.15)
approx.25 g

6"pigtail
approx.25 g

DC 3 wire 10-30V NPN N.O.
DC 3 wire 10-30V NPN N.C.
DC 3 wire 10-30V PNP N.O.
DC 3 wire 10-30V PNP N.C.
DC 3 wire 10-55V NPN N.O.
DC 3 wire 10-55V NPN N.C.
DC 3 wire 10-55V PNP N.O.
DC 3 wire 10-55V PNP N.C.
DC 3 wire 5-36 V NPN N.O.
DC 3 wire 5-36 V NPN N.C.
DC 3 wire 5-36 V PNP N.O.
DC 3 wire 5-36 V PNP N.C.

ISS-M501N-A1VS2	1*
ISS-M501N-B1VS2	2
ISS-M501P-A1VS2	3
ISS-M501P-B1VS2	4

ISS-M501N-A1GS	1*
ISS-M501N-B1GS	2
ISS-M501P-A1GS	3
ISS-M501P-B1GS	4

* Wiring diagram number. Please see the relevant wiring diagram shown on Page 013 to Page 015.

ULTRA-MINI INDUCTIVE PROXIMITY SENSOR (10-30VDC/10-55VDC/5-36VDC)

Diameter
● Shielded ○ non-Shielded
Switching Distance, Sn: mm
Housing Material
● With LED ○ Without LED



M5
●
1.5 mm
Stainless steel
●

M5
●
1.5 mm
Stainless steel
●

Picture



Dimensions (unit: mm)

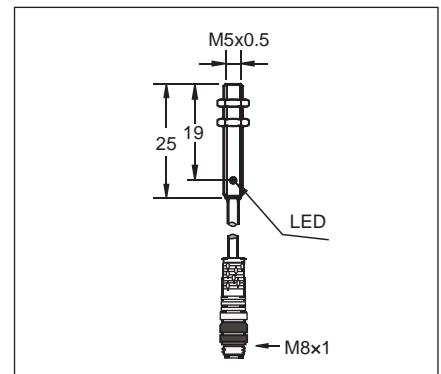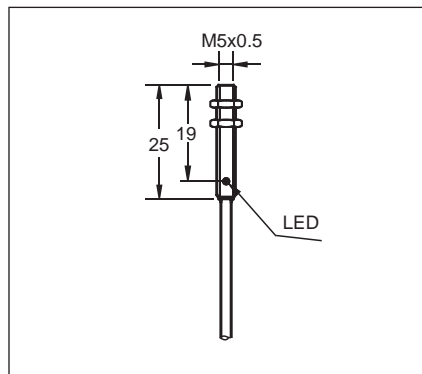

Ripple
No Load Current
Max. Load current
Leakage Current
Voltage Drop
Switching Frequency
Response Time
Switching Hysteresis
Repeat Accuracy
Protection Category
Operating Temperature
Temperature Drift
Short Circuit Protection
Overload Trip Point
Material Active Face

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃ - +70℃
<10%(Sr)
Yes
220mA
POM

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃ - +70℃
<10%(Sr)
Yes
220mA
POM

Connecting type
Weight

2M Cable (2.6 φ 3x0.15)
approx.30 g

6"pigtail
approx.25 g

DC 3 wire 10-30V NPN N.O.
DC 3 wire 10-30V NPN N.C.
DC 3 wire 10-30V PNP N.O.
DC 3 wire 10-30V PNP N.C.
DC 3 wire 10-55V NPN N.O.
DC 3 wire 10-55V NPN N.C.
DC 3 wire 10-55V PNP N.O.
DC 3 wire 10-55V PNP N.C.
DC 3 wire 5-36 V NPN N.O.
DC 3 wire 5-36 V NPN N.C.
DC 3 wire 5-36 V PNP N.O.
DC 3 wire 5-36 V PNP N.C.

ISS-M51.5N-A1VS2	1*
ISS-M51.5N-B1VS2	2
ISS-M51.5P-A1VS2	3
ISS-M51.5P-B1VS2	4

ISS-M51.5N-A1GS	1*
ISS-M51.5N-B1GS	2
ISS-M51.5P-A1GS	3
ISS-M51.5P-B1GS	4

* Wiring diagram number. Please see the relevant wiring diagram shown on Page 013 and Page 014.

ULTRA-MINI INDUCTIVE PROXIMITY SENSOR (10-30VDC/10-55VDC/5-36VDC)

Diameter
● Shielded ○ non-Shielded
Switching Distance, Sn: mm
Housing Material
● With LED ○ Without LED



M5
●
1 mm
Stainless steel
●

M5
●
1 mm
Stainless steel
●

Picture



Dimensions (unit: mm)

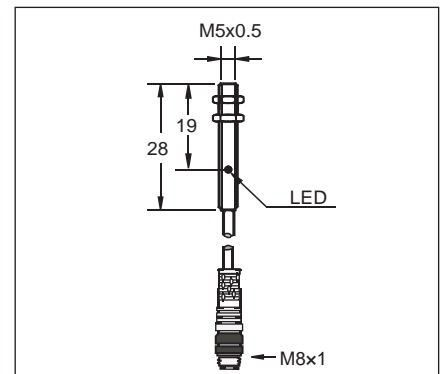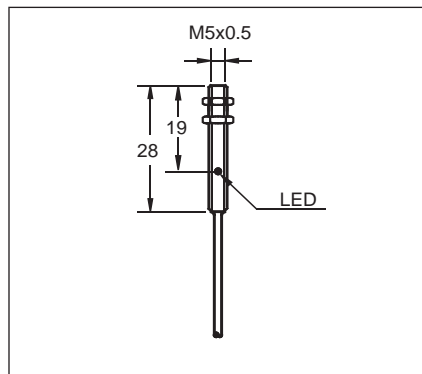

Ripple
No Load Current
Max. Load current
Leakage Current
Voltage Drop
Switching Frequency
Response Time
Switching Hysteresis
Repeat Accuracy
Protection Category
Operating Temperature
Temperature Drift
Short Circuit Protection
Overload Trip Point
Material Active Face

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25°C - +70°C
<10%(Sr)
Yes
220mA
POM

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25°C - +70°C
<10%(Sr)
Yes
220mA
POM

Connecting type
Weight

2M Cable (2.6 ϕ 3x0.15)
approx.30 g

6"pigtail
approx.25 g

DC 3 wire 10-30V NPN N.O.
DC 3 wire 10-30V NPN N.C.
DC 3 wire 10-30V PNP N.O.
DC 3 wire 10-30V PNP N.C.
DC 3 wire 10-55V NPN N.O.
DC 3 wire 10-55V NPN N.C.
DC 3 wire 10-55V PNP N.O.
DC 3 wire 10-55V PNP N.C.
DC 3 wire 5-36 V NPN N.O.
DC 3 wire 5-36 V NPN N.C.
DC 3 wire 5-36 V PNP N.O.
DC 3 wire 5-36 V PNP N.C.

ISS-M501N-A1VN2	1*
ISS-M501N-B1VN2	2
ISS-M501P-A1VN2	3
ISS-M501P-B1VN2	4

ISS-M501N-A1GN	1*
ISS-M501N-B1GN	2
ISS-M501P-A1GN	3
ISS-M501P-B1GN	4

* Wiring diagram number. Please see the relevant wiring diagram shown on Page 013 to Page 015.

ULTRA-MINI INDUCTIVE PROXIMITY SENSOR (10-30VDC/10-55VDC/5-36VDC)

Diameter
● Shielded ○ non-Shielded
Switching Distance, Sn: mm
Housing Material
● With LED ○ Without LED



M5
●
1.5 mm
Stainless steel
●

M5
●
1.5 mm
Stainless steel
●

Picture



Dimensions (unit: mm)

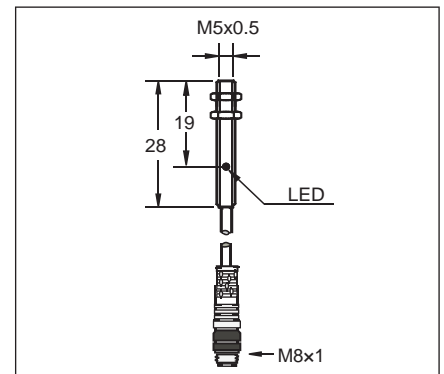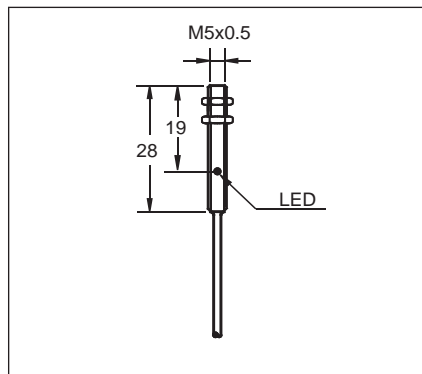

Ripple
No Load Current
Max. Load current
Leakage Current
Voltage Drop
Switching Frequency
Response Time
Switching Hysteresis
Repeat Accuracy
Protection Category
Operating Temperature
Temperature Drift
Short Circuit Protection
Overload Trip Point
Material Active Face

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃- +70℃
<10%(Sr)
Yes
220mA
POM

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃- +70℃
<10%(Sr)
Yes
220mA
POM

Connecting type
Weight

2M Cable (2.6 Φ 3x0.15)
approx.25 g

6"pigtail
approx.30 g

DC 3 wire 10-30V NPN N.O.
DC 3 wire 10-30V NPN N.C.
DC 3 wire 10-30V PNP N.O.
DC 3 wire 10-30V PNP N.C.
DC 3 wire 10-55V NPN N.O.
DC 3 wire 10-55V NPN N.C.
DC 3 wire 10-55V PNP N.O.
DC 3 wire 10-55V PNP N.C.
DC 3 wire 5-36 V NPN N.O.
DC 3 wire 5-36 V NPN N.C.
DC 3 wire 5-36 V PNP N.O.
DC 3 wire 5-36 V PNP N.C.

ISS-M51.5N-A1VN2	1*
ISS-M51.5N-B1VN2	2
ISS-M51.5P-A1VN2	3
ISS-M51.5P-B1VN2	4

ISS-M51.5N-A1GN	1*
ISS-M51.5N-B1GN	2
ISS-M51.5P-A1GN	3
ISS-M51.5P-B1GN	4

* Wiring diagram number. Please see the relevant wiring diagram shown on Page 013 and Page 014.

ULTRA-MINI INDUCTIVE PROXIMITY SENSOR (10-30VDC/10-55VDC/5-36VDC)

Diameter
● Shielded ○ non-Shielded
Switching Distance, Sn: mm
Housing Material
● With LED ○ Without LED



M5
●
1 mm
Stainless steel
●

M5
●
1.5 mm
Stainless steel
●

Picture



Dimensions (unit: mm)

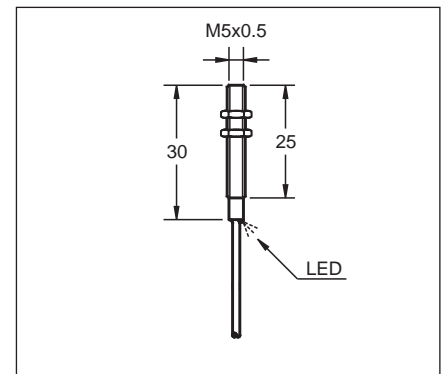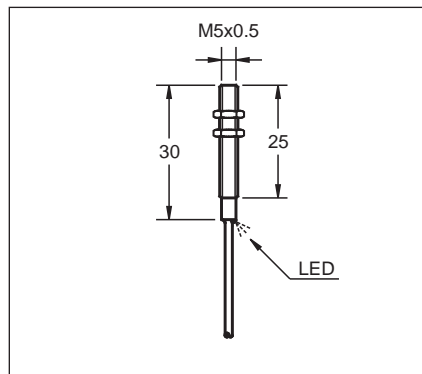

Ripple
No Load Current
Max. Load current
Leakage Current
Voltage Drop
Switching Frequency
Response Time
Switching Hysteresis
Repeat Accuracy
Protection Category
Operating Temperature
Temperature Drift
Short Circuit Protection
Overload Trip Point
Material Active Face

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃- +70℃
<10%(Sr)
Yes
220mA
POM

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃- +70℃
<10%(Sr)
Yes
220mA
POM

Connecting type
Weight

2M Cable (2.6 ϕ 3x0.15)
approx.25 g

2M Cable (2.6 ϕ 3x0.15)
approx.25 g

DC 3 wire 10-30V NPN N.O.
DC 3 wire 10-30V NPN N.C.
DC 3 wire 10-30V PNP N.O.
DC 3 wire 10-30V PNP N.C.
DC 3 wire 10-55V NPN N.O.
DC 3 wire 10-55V NPN N.C.
DC 3 wire 10-55V PNP N.O.
DC 3 wire 10-55V PNP N.C.
DC 3 wire 5-36 V NPN N.O.
DC 3 wire 5-36 V NPN N.C.
DC 3 wire 5-36 V PNP N.O.
DC 3 wire 5-36 V PNP N.C.

ISS-M501N-A1VL2	1*
ISS-M501N-B1VL2	2
ISS-M501P-A1VL2	3
ISS-M501P-B1VL2	4

ISS-M51.5N-A1VL2	1*
ISS-M51.5N-B1VL2	2
ISS-M51.5P-A1VL2	3
ISS-M51.5P-B1VL2	4

* Wiring diagram number. Please see the relevant wiring diagram shown on Page 013 to Page 015.


ULTRA-MINI INDUCTIVE PROXIMITY SENSOR (10-30VDC/10-55VDC/5-36VDC)

Diameter
● Shielded ○ non-Shielded
Switching Distance, Sn: mm
Housing Material
● With LED ○ Without LED



M5
●
1 mm
Stainless steel
●

M5
●
1.5 mm
Stainless steel
●

Picture

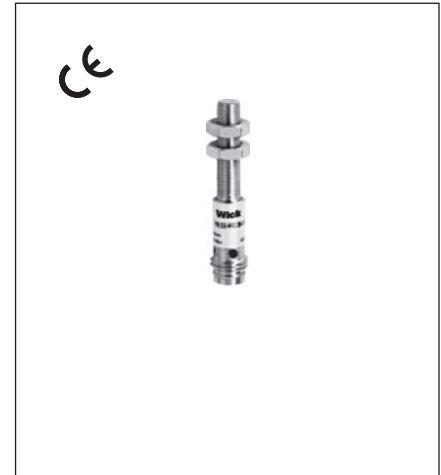

Dimensions (unit: mm)

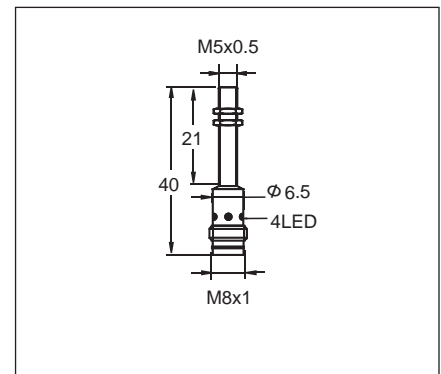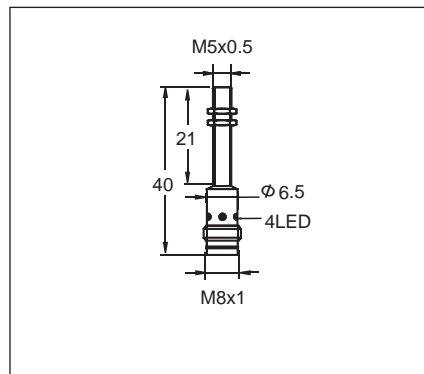

Ripple
No Load Current
Max. Load current
Leakage Current
Voltage Drop
Switching Frequency
Response Time
Switching Hysteresis
Repeat Accuracy
Protection Category
Operating Temperature
Temperature Drift
Short Circuit Protection
Overload Trip Point
Material Active Face

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25°C - +70°C
<10%(Sr)
Yes
220mA
POM

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25°C - +70°C
<10%(Sr)
Yes
220mA
POM

Connecting type
Weight

M8 connector
approx.25 g

M8 connector
approx.14 g

DC 3 wire 10-30V NPN N.O.
DC 3 wire 10-30V NPN N.C.
DC 3 wire 10-30V PNP N.O.
DC 3 wire 10-30V PNP N.C.
DC 3 wire 10-55V NPN N.O.
DC 3 wire 10-55V NPN N.C.
DC 3 wire 10-55V PNP N.O.
DC 3 wire 10-55V PNP N.C.
DC 3 wire 5-36 V NPN N.O.
DC 3 wire 5-36 V NPN N.C.
DC 3 wire 5-36 V PNP N.O.
DC 3 wire 5-36 V PNP N.C.

ISS-M501N-A1PN3	1*
ISS-M501N-B1PN3	2
ISS-M501P-A1PN3	3
ISS-M501P-B1PN3	4

ISS-M51.5N-A1PN3	1*
ISS-M51.5N-B1PN3	2
ISS-M51.5P-A1PN3	3
ISS-M51.5P-B1PN3	4

* Wiring diagram number. Please see the relevant wiring diagram shown on Page 013 and Page 014.


ULTRA-MINI INDUCTIVE PROXIMITY SENSOR (10-30VDC/10-55VDC/5-36VDC)

Diameter
● Shielded ○ non-Shielded
Switching Distance, Sn: mm
Housing Material
● With LED ○ Without LED



Q5x5x26
●
1 mm
Nickel plated brass
●

Q5x5x26
●
1 mm
Nickel plated brass
●

Picture

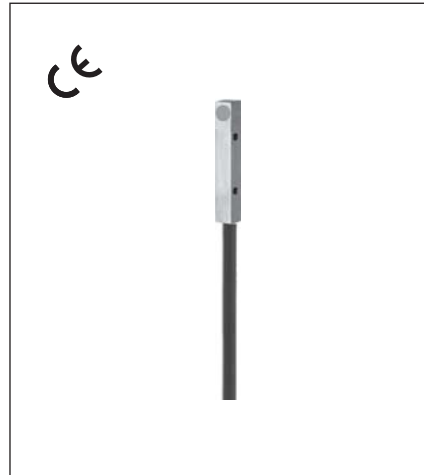

Dimensions (unit: mm)

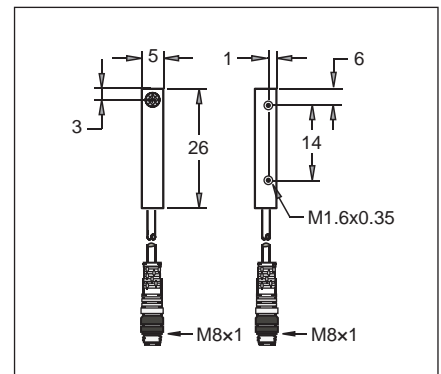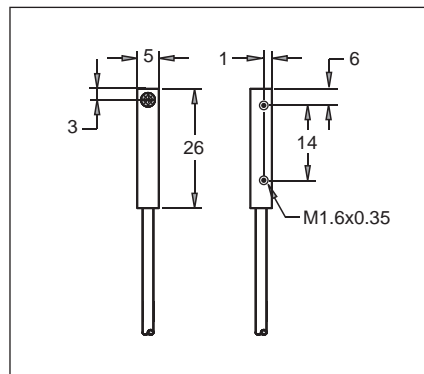

Ripple
No Load Current
Max. Load current
Leakage Current
Voltage Drop
Switching Frequency
Response Time
Switching Hysteresis
Repeat Accuracy
Protection Category
Operating Temperature
Temperature Drift
Short Circuit Protection
Overload Trip Point
Material Active Face

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃- +70℃
<10%(Sr)
Yes
220mA
POM

<10%
<10mA
200mA
<0.01mA
<1.5V
2KHz
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃- +70℃
<10%(Sr)
Yes
220mA
POM

Connecting type
Weight

2M Cable (2.6 ∅ 3x0.15)
approx.25 g

2M Cable (2.6 ∅ 3x0.15)
approx.25 g

DC 3 wire 10-30V NPN N.O.
DC 3 wire 10-30V NPN N.C.
DC 3 wire 10-30V PNP N.O.
DC 3 wire 10-30V PNP N.C.
DC 3 wire 10-55V NPN N.O.
DC 3 wire 10-55V NPN N.C.
DC 3 wire 10-55V PNP N.O.
DC 3 wire 10-55V PNP N.C.
DC 3 wire 5-36 V NPN N.O.
DC 3 wire 5-36 V NPN N.C.
DC 3 wire 5-36 V PNP N.O.
DC 3 wire 5-36 V PNP N.C.

IBS-Q5501N-A1VN2	1*
IBS-Q5501N-B1VN2	2
IBS-Q5501P-A1VN2	3
IBS-Q5501P-B1VN2	4

IBS-Q5501N-A1GL	1*
IBS-Q5501N-B1GL	2
IBS-Q5501P-A1GL	3
IBS-Q5501P-B1GL	4

* Wiring diagram number. Please see the relevant wiring diagram shown on Page 013 and Page 014.