

PLASTIC BARREL INDUCTIVE PROXIMITY SENSOR (10-30VDC/10-55VDC/5-36VDC)

Diameter
● Shielded ○ non-Shielded
Switching Distance, Sn: mm
Housing Material
● With LED ○ Without LED


M30	
●	○
10 mm	15 mm
PBT	
●	

Picture



--

Dimensions (unit: mm)

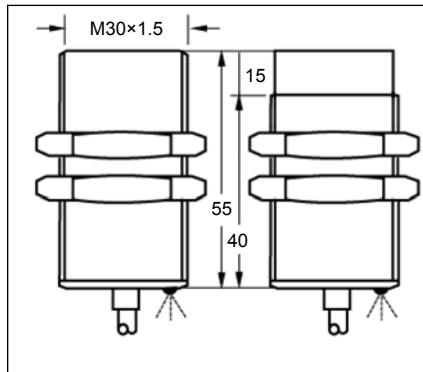

--

Ripple
No Load Current
Max. Load current
Leakage Current
Voltage Drop
Switching Frequency
Response Time
Switching Hysteresis
Repeat Accuracy
Protection Category
Operating Temperature
Temperature Drift
Short Circuit Protection
Overload Trip Point
Material Active Face

<10%
<10mA
200mA
<0.01mA
<1.5V
300Hz 150Hz
0.5ms/0.5ms 1ms/1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25℃ - +70℃
<10%(Sr)
Yes
220mA
PBT

Connecting type
Weight

2M Cable (5.0 ϕ 3x0.34)
approx.200 g

DC 3 wire 10-30V NPN N.O.
DC 3 wire 10-30V NPN N.C.
DC 3 wire 10-30V PNP N.O.
DC 3 wire 10-30V PNP N.C.
DC 3 wire 10-55V NPN N.O.
DC 3 wire 10-55V NPN N.C.
DC 3 wire 10-55V PNP N.O.
DC 3 wire 10-55V PNP N.C.
DC 3 wire 5-36 V NPN N.O.
DC 3 wire 5-36 V NPN N.C.
DC 3 wire 5-36 V PNP N.O.
DC 3 wire 5-36 V PNP N.C.

IPS-M3010N-A1VN2	1*	IPN-M3015N-A1VN2
IPS-M3010N-B1VN2	2	IPN-M3015N-B1VN2
IPS-M3010P-A1VN2	3	IPN-M3015P-A1VN2
IPS-M3010P-B1VN2	4	IPN-M3015P-B1VN2
IPS-M3010N-A3VN2	1	IPN-M3015N-A3VN2
IPS-M3010N-B3VN2	2	IPN-M3015N-B3VN2
IPS-M3010P-A3VN2	3	IPN-M3015P-A3VN2
IPS-M3010P-B3VN2	4	IPN-M3015P-B3VN2
IPS-M3010N-A2VN2	1	IPN-M3015N-A2VN2
IPS-M3010N-B2VN2	2	IPN-M3015N-B2VN2
IPS-M3010P-A2VN2	3	IPN-M3015P-A2VN2
IPS-M3010P-B2VN2	4	IPN-M3015P-B2VN2

* Wiring diagram number. Please see the relevant wiring diagram shown on Page 013 to Page 015.